





ENCLOSURES FOR UL LISTED 4" and 8" LOUDSPEAKERS

U96-4(X), U198-4, USE198-4,
U(T)95-8, U96-8, U(T)191-78,
U193-8, U(T)198-8, USE175-4

**NEW
Plenum
Rating**

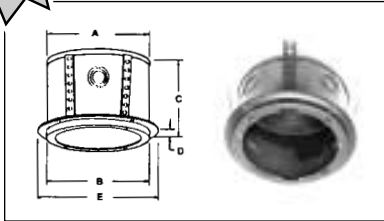


U96-4

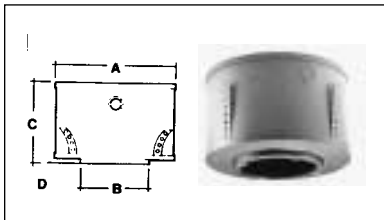


U198-4



U96-4X

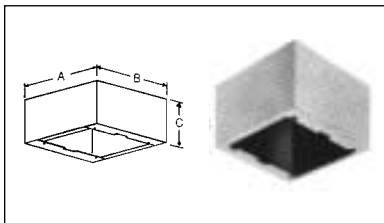

USE198-4

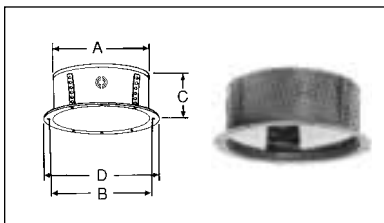

U95-8

GENERAL DESCRIPTION

To meet UL Standard 1480 installation requirements, the following enclosures are offered for application with Atlas Sound UL Listed fire-protective signaling loudspeaker Series UDT, UST, UHT, and UKT. These enclosures are UL approved for use with specific loudspeaker/transformer/baffle models only and do not carry a separate UL designation. The recessed models are plenum rated under UL file S1824. For your convenience, companion baffles for each enclosure are also listed in the "Mounts" column of each chart. For detailed loudspeaker information, refer to the following specification sheets: UDT Series - (SL6-1416), UST Series - (SL6-1564), UHT / UKT Series - (SL6-1181).

ENCLOSURES FOR 4" FIRE PROTECTIVE SIGNALLING LOUDSPEAKERS

U96-4 / U96-4X. Cost-efficient standard and volume enclosures respectively are listed for application with UDT Series 4" loudspeakers when equipped with baffle models U51-4or U60-4. Extra-depth Model U96-4X is designed for application with UDT or UST Series 4" loudspeakers which require improved low-end frequency response. Both models are constructed of CRS, undercoated, and finished in black epoxy.

MODEL	A	B	C	D	E	MOUNTS
U96-4*	6¼" (159mm)	6¼"	4¼" (108mm)	½"	7½"	U51-4
U96-4X	10" (254mm)	(159mm)	6" (152mm)	(13mm)	(181mm)	U60-4

* Use with UDT Series only. UST requires the deeper U96-4X

U198-4. Square enclosure is approved for use with UDT and UST Series 4" loudspeakers when equipped with baffle Model U161-4. Recessed enclosure is constructed of CRS with four compound knockouts, undercoating, and epoxy finish.

MODEL	A	B	C	MOUNTS
U198-4	6¼" (159mm)	6¼" (159mm)	4¼" (108mm)	U161-4

USE198-4. Attractive square enclosure is designed for surface mounting UDT and UST Series 4" loudspeakers with Model U161-4 baffle. Contemporary design is suitable for a wide range of commercial and institutional applications. It is constructed of CRS, undercoated, and finished in white epoxy.

MODEL	A	B	C	MOUNTS
USE198-4	7½" (181mm)	7½" (181mm)	4¾" (111mm)	U161-4

ENCLOSURES FOR 8" FIRE PROTECTIVE SIGNALLING LOUDSPEAKERS

U95-8 / UT95-8. Industry standard Model U95-8 will accept a variety of UHT and UKT Series 8" loudspeaker assemblies. Model UT95-8 is designed for UHT Series loudspeakers with listed torsion grilles only. CRS units have four compound knockouts, four flexible perforated mounting straps, and include undercoating, patch jute lining, and painted epoxy finish.

MODEL	A	B	C	D	MOUNTS
U95-8	10½" (257mm)	11¼" (286mm)	4¼" (108mm)	11¾" (298mm)	U51-8, U61-8W, U62-8 UG22-8, UM222W
UT95-8					UT51-8, UT61-8W

Specifications subject to change without notice




Northeast Total Communications


Toll free: (800)-362-7542 Fax: (215)-639-2476 E-mail: info@ntcinc.com

SIX


329

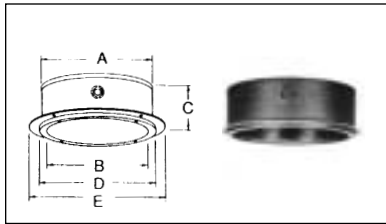


U96-8

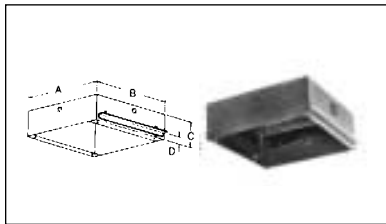


U191 Series

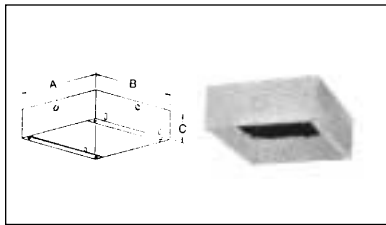

U193-8

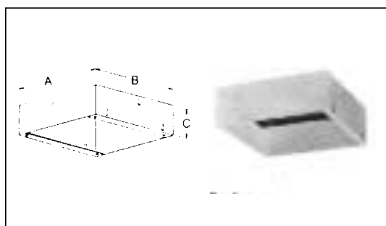

U198 Series

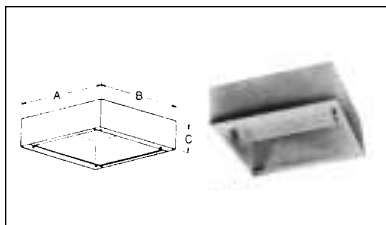

USE175-4

U96-8. Popular enclosure is designed with mounting holes located on the internal flange to provide installation ease and convenience. Model is particularly suited to mounting UKT and UHT Series 8" loudspeakers in acoustic tile ceiling applications. CRS unit is furnished with four compound knockouts, extended plaster flange, undercoating, and painted epoxy finish.

MODEL	A	B	C	D	E	MOUNTS
U96-8	11 $\frac{1}{8}$ " (302mm)	10 $\frac{3}{4}$ " (273mm)	4 $\frac{1}{4}$ " (108mm)	11 $\frac{1}{8}$ " (302mm)	13 $\frac{1}{2}$ " (343mm)	U51-8, U61-8W U62-8, UG22-8 UM222W

U191-78 / UT191-78. Versatile enclosures feature an adjustable mounting bracket to provide installation flexibility of loudspeaker Model Series UHT in a variety of ceiling types and depths. Available in standard and torsion (T) versions, they are constructed of CRS, and include four compound knockouts, heavy undercoating, patch jute lining, and painted epoxy finish.

MODEL	A	B	C	D	MOUNTS
U191-78	11 $\frac{11}{16}$ " (297mm)	11 $\frac{11}{16}$ " (297mm)	4" (102mm)	* $\frac{1}{16}$ - $\frac{3}{4}$ " (2-19mm)	164-8
UT191-78					UT164-8

* Adjustable Mounting Flange.

U193-8. Cost efficient enclosure is designed for recessed installation of UHT Series 8" loudspeakers that are equipped with vandal proof baffle Model UVP161-R8. CRS unit comes complete with four compound knockouts, undercoating, and painted epoxy finish.

MODEL	A	B	C	MOUNTS
U193-8	9 $\frac{9}{16}$ " (243mm)	9 $\frac{9}{16}$ " (243mm)	3 $\frac{3}{4}$ " (95mm)	UVP161-R8

U198-8 / UT198-8. Square enclosures are available in screw mount and torsion spring (T) versions. Model U198-8 will mount UHT and UKT Series 8" loudspeakers with U161-8 grille. Model UT198-8 is designed for application with UHT Series 8" loudspeakers equipped with UT161-8 grille only. CRS units are provided with four compound knockouts, undercoating, and painted epoxy finish.

MODEL	A	B	C	MOUNTS
U198-8	10 $\frac{11}{16}$ " (271mm)	10 $\frac{11}{16}$ " (271mm)	3 $\frac{3}{4}$ " (95mm)	U161-8
UT198-8				UT161-8

USE175-4. Attractive and highly versatile enclosure is designed for surface installation of 8" fire protective signaling loudspeakers. It mounts UHT and UKT Series 8" Models with standard and torsion spring (T) baffle Models U161-8 and UT161-8 respectively. CRS unit is undercoated and finished in white epoxy.

MODEL	A	B	C	MOUNTS
USE175-4	11 $\frac{5}{8}$ " (295mm)	11 $\frac{5}{8}$ " (295mm)	4" (102mm)	U161-8 UT161-8

Specifications subject to change without notice



Northeast Total Communications

Toll free: (800)-362-7542 Fax: (215)-639-2476 E-mail: info@ntcinc.com



4" DIAMETER/10 WATT UL LISTED HIGH-FIDELITY LOUDSPEAKER ASSEMBLIES


UST SERIES



UST87C51-4



UST82C51-4 /
UST87C51-4



UST82C161-4 /
UST87C161-4

FEATURES

- Ten-Watt, UL Listed, Loudspeakers Provide Dual-Purpose Capability for High-Fidelity Music/Paging and/or Emergency Alarm System Use
- Attractive 4" Diameter Ceiling Loudspeaker Assemblies Provide Excellent Freq. Response, Wide-Angle Dispersion, and Unobtrusive Appearance of Paging or Life Safety/Emergency Signaling Loudspeakers
- Choose from Round or Square Baffle Styles to Meet Architectural Preference
- Pre-Assembled Loudspeaker, 8-Watt Transformer, and Baffle is Shipped Complete, Ready for Installation into Matched Atlas Sound UL Listed Enclosure (order separately)
- Loudspeakers are Listed Under UL Standard 1480 (Speakers for Fire Protective Signaling Systems) for Indoor Use

APPLICATIONS

Install high-efficiency UST Series loudspeakers to reproduce emergency warning signals and life safety communications with clear audibility in high-rise hotels, apartment complexes, schools, public, and retail establishments (Where Permitted by Local Codes). These multi-functional units feature a 10-watt, high-fidelity 4" loudspeaker (Model FC104) with a frequency response of 105 Hz-17kHz, and an 8-watt, multi-tapped transformer. This configuration provides a wide frequency range allowing it to function in either an emergency warning or background music/paging system. This dual capability effectively reduces system and installation expenses by eliminating the need for two separate speaker systems (where permitted by local codes); one for emergency warning; and one for paging.

GENERAL DESCRIPTION

Atlas Sound's UST Series UL Listed loudspeaker assemblies are dual purpose, sound/paging and fire-protective signaling devices. The 10-watt loudspeaker is a high-performance, 4" diameter unit with a sound pressure level of 93dB (1W/1M) to provide efficient reproduction of emergency communications with minimal input power demand. It is designed to be used with compatible control equipment to provide clear and audible voice and signal communication.

Factory assemblies include a damped, high-compliance cone, factory-mounted 70.7 or 25-volt transformer with terminal strip connections, DC blocking capacitor, and choice of round or square baffle styles.

To meet code requirements for ceiling installation, units mount specified Atlas Sound UL Listed and plenum-rated enclosures. UST Series is listed under UL Standard 1480, Speakers for Fire Protective Signaling Systems, provided that recommended enclosures are used for each model.

SOUND PRESSURE LEVEL VERSUS POWER INPUT

POWER IN	UL 3dB INCREMENT RATING @ 10 Feet
1 Watt	78dB
2 Watt	81dB
4 Watts	84dB
8 Watts	87dB

LOUDSPEAKER SPECIFICATIONS

MODEL	SIZE	CERAMIC MAGNET	FREQUENCY RESPONSE	POWER RATING	IMPEDANCE	FLUX DENSITY	SENSITIVITY	DISPERSION	VOICE COIL DIAMETER	DEPTH	WEIGHT*
UST SERIES	4" (102mm)	10 oz. (0.28 kg)	105 Hz - 17 kHz	10 Watts	8 Ohms	10,500 Gauss	93dB 1W / 1M	180° (-6dB, 2kHz Oct. Band)	3/4" (19mm)	4 1/4" (108mm)	3.25 lbs. (1.5 kgs.)

* Model weighed is UST87C161-4

LOUDSPEAKER ASSEMBLY INFORMATION

MODEL	VOLTAGE	XFMR SPECIFICATIONS			BAFFLE		MOUNTS** (ORDER SEPARATELY)
		POWER TAPS	CORE SIZE	DC BLOCKING CAPACITOR	TYPE	DESCRIPTION / SIZE	
UST87C51-4	70.7	1, 2, 4, 8 Watts	3/4" SQ. (19mm)	70.7 V: 4 mfd @ 150V	U51-4	Round, White w/ 4 holes 7 3/8" Diameter (187mm)	U96-4X
UST82C51-4	25			25 V: 10 mfd @ 50V	U161-4	Square, White w/ 4 holes 7" Square (178mm)	
UST87C161-4	70.7			70.7 V: 4 mfd @ 150V			U161-4
UST82C161-4	25			25 V: 10 mfd @ 50V			

** UL Listed enclosures are also plenum rated (except Model USE198-4 which is surface mounted). For complete enclosure specs, see SL6-1424.

Specifications subject to change without notice




Northeast Total Communications


Toll free: (800)-362-7542 Fax: (215)-639-2476 E-mail: info@ntcinc.com

SIX


325

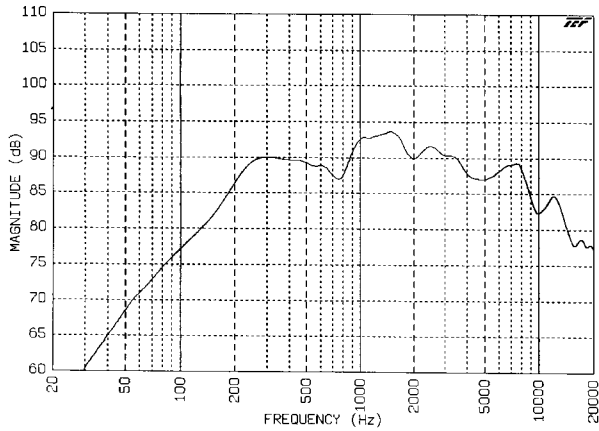


FC104 : Frequency Response

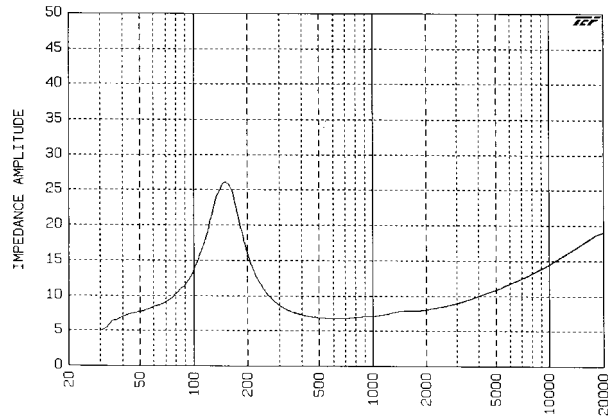


FC104: Impedance




**1 KHZ Octave Band,
Grid Spacing+6dB
/Major Division**



**2 KHZ Octave Band,
Grid Spacing+6dB
/Major Division**



**4 KHZ Octave Band,
Grid Spacing+6dB
/Major Division**



**8 KHZ Octave Band,
Grid Spacing+6dB
/Major Division**



ARCHITECT AND ENGINEER SPECIFICATIONS

The audio signaling devices shall be Atlas Sound UST Series Model _____ or approved equal. Devices shall incorporate a 4" diameter loudspeaker with 10 ounce ceramic magnet; damped, high-compliance type cone; 10 watt RMS power handling capacity; and a frequency response of 105 Hz - 17 kHz. Factory-mounted, line matching transformer shall be constructed with audio grade laminations, varnish sealed, and shall include a DC blocking capacitor wired

in series with the transformer primary. Transformer voltage shall be _____ (70.7 or 25) Volt with terminal strip connector power taps of 1, 2, 4, and 8 watts on the primary side. Units shall be UL Listed and conform to those specifications required under UL Standard 1480. The factory mounted baffle shall be _____ (round, square) with a textured white finish. Loudspeaker / transformer / baffle assemblies shall mount to UL Listed enclosure Model _____.

CAUTION: Connect wiring as shown.

DO NOT loop under terminals. Break each wire run before connecting to provide supervision of connections.

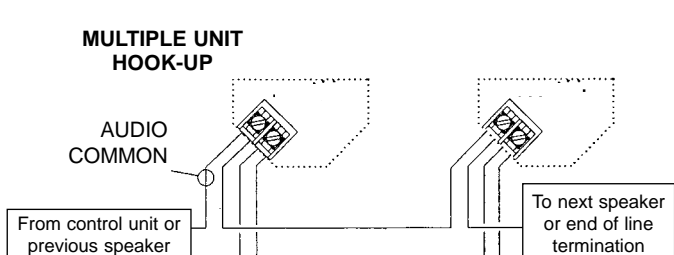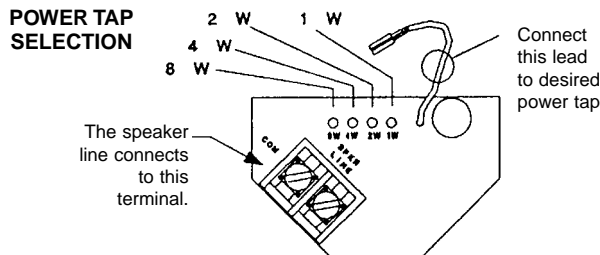

Specifications subject to change without notice



Northeast Total Communications

Toll free: (800)-362-7542 Fax: (215)-639-2476 E-mail: info@ntcinc.com



8" DIAMETER/10 WATT UL LISTED LOUDSPEAKER ASSEMBLIES

UHT SERIES
UKT SERIES



UHT Series



UKT Series

FEATURES

- UL Listed, Fire-Retardant and Moisture-Proof Cone Loudspeakers Reproduce Emergency Alarm and Voice Instructions with Superior Intelligibility and Extended Frequency Response
- Attractive Ceiling-Loudspeaker/Baffle Assemblies Provide Unobtrusive Appearance of Life Safety and Emergency Signaling Loudspeakers
- Selection of Baffle Styles and Multi-Tapped Transformers Meet a Variety of Aesthetic and Application Requirements
- Listed Under UL Standard 1480 (Speakers for Fire-Protective Signaling Systems)
- Selection of UL Approved, Companion Enclosures is Offered

APPLICATIONS

Install attractive UL Listed UHT and UKT Series ceiling loudspeaker/baffle/transformer packages for dependable voice and alarm transmission in emergency audio evacuation systems. Cone loudspeaker assemblies deliver superior intelligibility for application in multi-occupancy and expanded space areas including high-rise residences, public buildings, health care and educational facilities, offices, banks, shopping areas, motels/hotels, distribution centers, and transportation terminals. Applied properly, single and dual voice coil models meet life safety code requirements per N.F.P.A. Standard 72 for supervised loudspeakers in fire-protective signaling and communication systems.

GENERAL DESCRIPTION

Atlas Sound's UHT and UKT Series are 8" diameter single and dual voice coil loudspeakers equipped with dual (whizzer) cone and 10 oz. ceramic magnet to deliver extended frequency response with high intelligibility and minimal distortion. Cost-effective units are complete with fire-retardant moisture-proof cones, factory-mounted transformer, 6" color-coded leads, and a wide selection of architecturally pleasing baffles. UHT Series loudspeakers have a 1" dia. voice coil, choice of 70.7 or 25-volt transformer, and DC blocking capacitor for line supervision applications. UKT Series loudspeakers are equipped with two 1" dia. voice coils, two transformers (specify 70.7 or 25 volts), and a DC blocking capacitor. To comply with UL requirements, loudspeaker packages must be used with UL-approved enclosures (refer to back page for baffle/enclosure information and to SL6-1424 "Enclosures for UL Listed Loudspeakers").

SIX

LOUDSPEAKER SPECIFICATIONS

MODEL	SIZE	MAGNET	FREQUENCY RESPONSE	POWER RATING(RMS)	IMPEDANCE	FLUX DENSITY	SENSITIVITY *	VOICE COIL DIAMETER	DEPTH
UHT	8" (203mm)	10 oz. (260 g)	85 Hz - 8 kHz ± 5dB	10 Watts	8 Ohms	10,600 Gauss	97dB Peak 94dB Avg.	1" (25mm)	2 7/8" (73mm)
UKT			60 Hz - 8 kHz ± 5dB	10 Watts	8 Ohms (each coil)		94dB Peak 91dB Avg.		

* UL ratings measured per UL Standard 1480 at 1 watt, 10 feet (3dB increment rating): UHT = 81dB; UKT = 78dB.

Specifications subject to change without notice



Northeast Total Communications

Toll free: (800)-362-7542 Fax: (215)-639-2476 E-mail: info@ntcinc.com

327




4" DIAMETER/10 WATT UL LISTED HIGH-FIDELITY LOUDSPEAKER ASSEMBLIES


UST SERIES



UST87C51-4



UST82C51-4 /
UST87C51-4



UST82C161-4 /
UST87C161-4

FEATURES

- Ten-Watt, UL Listed, Loudspeakers Provide Dual-Purpose Capability for High-Fidelity Music/Paging and/or Emergency Alarm System Use
- Attractive 4" Diameter Ceiling Loudspeaker Assemblies Provide Excellent Freq. Response, Wide-Angle Dispersion, and Unobtrusive Appearance of Paging or Life Safety/Emergency Signaling Loudspeakers
- Choose from Round or Square Baffle Styles to Meet Architectural Preference
- Pre-Assembled Loudspeaker, 8-Watt Transformer, and Baffle is Shipped Complete, Ready for Installation into Matched Atlas Sound UL Listed Enclosure (order separately)
- Loudspeakers are Listed Under UL Standard 1480 (Speakers for Fire Protective Signaling Systems) for Indoor Use

APPLICATIONS

Install high-efficiency UST Series loudspeakers to reproduce emergency warning signals and life safety communications with clear audibility in high-rise hotels, apartment complexes, schools, public, and retail establishments (Where Permitted by Local Codes). These multi-functional units feature a 10-watt, high-fidelity 4" loudspeaker (Model FC104) with a frequency response of 105 Hz-17kHz, and an 8-watt, multi-tapped transformer. This configuration provides a wide frequency range allowing it to function in either an emergency warning or background music/paging system. This dual capability effectively reduces system and installation expenses by eliminating the need for two separate speaker systems (where permitted by local codes); one for emergency warning; and one for paging.

GENERAL DESCRIPTION

Atlas Sound's UST Series UL Listed loudspeaker assemblies are dual purpose, sound/paging and fire-protective signaling devices. The 10-watt loudspeaker is a high-performance, 4" diameter unit with a sound pressure level of 93dB (1W/1M) to provide efficient reproduction of emergency communications with minimal input power demand. It is designed to be used with compatible control equipment to provide clear and audible voice and signal communication.

Factory assemblies include a damped, high-compliance cone, factory-mounted 70.7 or 25-volt transformer with terminal strip connections, DC blocking capacitor, and choice of round or square baffle styles.

To meet code requirements for ceiling installation, units mount specified Atlas Sound UL Listed and plenum-rated enclosures. UST Series is listed under UL Standard 1480, Speakers for Fire Protective Signaling Systems, provided that recommended enclosures are used for each model.

SOUND PRESSURE LEVEL VERSUS POWER INPUT

POWER IN	UL 3dB INCREMENT RATING @ 10 Feet
1 Watt	78dB
2 Watt	81dB
4 Watts	84dB
8 Watts	87dB

LOUDSPEAKER SPECIFICATIONS

MODEL	SIZE	CERAMIC MAGNET	FREQUENCY RESPONSE	POWER RATING	IMPEDANCE	FLUX DENSITY	SENSITIVITY	DISPERSION	VOICE COIL DIAMETER	DEPTH	WEIGHT*
UST SERIES	4" (102mm)	10 oz. (0.28 kg)	105 Hz - 17 kHz	10 Watts	8 Ohms	10,500 Gauss	93dB 1W / 1M	180° (-6dB, 2kHz Oct. Band)	3/4" (19mm)	4 1/4" (108mm)	3.25 lbs. (1.5 kgs.)

* Model weighed is UST87C161-4

LOUDSPEAKER ASSEMBLY INFORMATION

MODEL	VOLTAGE	XFMR SPECIFICATIONS			BAFFLE		MOUNTS** (ORDER SEPARATELY)
		POWER TAPS	CORE SIZE	DC BLOCKING CAPACITOR	TYPE	DESCRIPTION / SIZE	
UST87C51-4	70.7	1, 2, 4, 8 Watts	3/4" SQ. (19mm)	70.7 V: 4 mfd @ 150V	U51-4	Round, White w/ 4 holes 7 3/8" Diameter (187mm)	U96-4X
UST82C51-4	25			25 V: 10 mfd @ 50V	U161-4	Square, White w/ 4 holes 7" Square (178mm)	
UST87C161-4	70.7			70.7 V: 4 mfd @ 150V			U161-4
UST82C161-4	25			25 V: 10 mfd @ 50V			

** UL Listed enclosures are also plenum rated (except Model USE198-4 which is surface mounted). For complete enclosure specs, see SL6-1424.

Specifications subject to change without notice




Northeast Total Communications


Toll free: (800)-362-7542 Fax: (215)-639-2476 E-mail: info@ntcinc.com

SIX


325

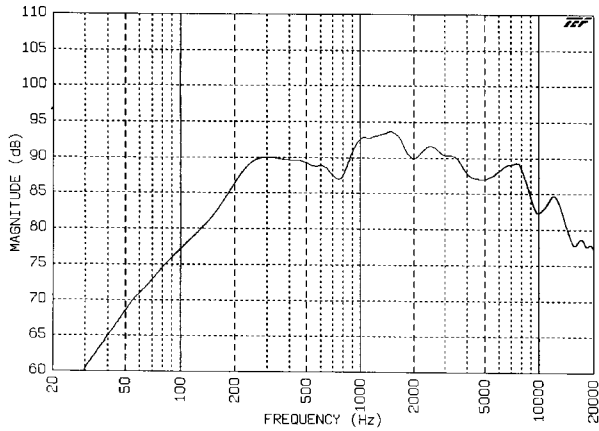


FC104 : Frequency Response

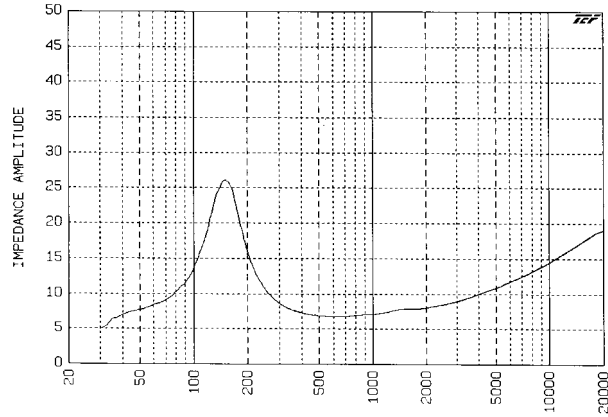


FC104: Impedance




1 KHZ Octave Band,
Grid Spacing+6dB
/Major Division



2 KHZ Octave Band,
Grid Spacing+6dB
/Major Division



4 KHZ Octave Band,
Grid Spacing+6dB
/Major Division



8 KHZ Octave Band,
Grid Spacing+6dB
/Major Division



ARCHITECT AND ENGINEER SPECIFICATIONS

The audio signaling devices shall be Atlas Sound UST Series Model _____ or approved equal. Devices shall incorporate a 4" diameter loudspeaker with 10 ounce ceramic magnet; damped, high-compliance type cone; 10 watt RMS power handling capacity; and a frequency response of 105 Hz - 17 kHz. Factory-mounted, line matching transformer shall be constructed with audio grade laminations, varnish sealed, and shall include a DC blocking capacitor wired

in series with the transformer primary. Transformer voltage shall be _____ (70.7 or 25) Volt with terminal strip connector power taps of 1, 2, 4, and 8 watts on the primary side. Units shall be UL Listed and conform to those specifications required under UL Standard 1480. The factory mounted baffle shall be _____ (round, square) with a textured white finish. Loudspeaker / transformer / baffle assemblies shall mount to UL Listed enclosure Model _____.

CAUTION: Connect wiring as shown.

DO NOT loop under terminals. Break each wire run before connecting to provide supervision of connections.

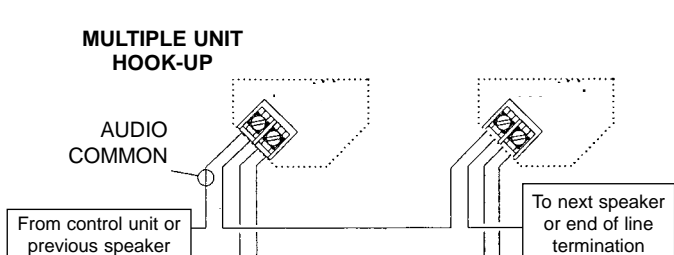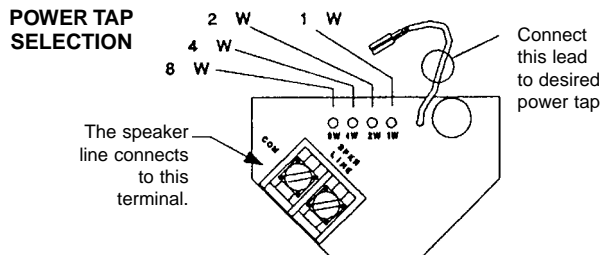

Specifications subject to change without notice




Northeast Total Communications

Toll free: (800)-362-7542 Fax: (215)-639-2476 E-mail: info@ntcinc.com

TRANSFORMER SPECIFICATIONS				
PRIMARY TAPS	SECONDARY	INSERTION LOSS	CORE SIZE	DC BLOCKING CAPACITOR
1/2, 1, 2, & 5 Watts	8 Ohms	1.5dB	1/2" x 5/8" (13mm x 16mm)	10 mfd @ 50V (25V Xfmr) 4 mfd @ 150V (70.7V Xfmr)

LOUDSPEAKER / TRANSFORMER / BAFFLE / ENCLOSURE INFORMATION							
MODEL	SPEAKER TYPE	BAFFLE		XFMR VOLTAGE	MOUNTS ENCLOSURE** (ORDER SEPARATELY)		
		TYPE	COLOR				
UHT70(25)C-U51-8	Single Voice Coil	U51-8	White	70.7V(25V)	U95-8, U96-8		
*UHT70(25)C-U61-8W		U61-8(W)	Brushed Aluminum or White		U95-8, U96-8		
*UHT70(25)C-U62-8		U62-8	White		U95-8, U96-8		
UHT70(25)C-U161-8		U161-8	White		U198-8, USE175-4		
*UHT70(25)C-U164-8		U164-8	White		U191-78		
*UHT70(25)C-U410-8		U410-8	Brushed Aluminum or White		Not Required		
*UHT70(25)C-UG22-8		UG22-8	Off White Matte		U95-8, U96-8		
*UHT70(25)C-UVP161-R8		UVP161-R8	White		U193-8		
*UHT70(25)C-UT51-8		UT51-8	White		U195-8		
*UHT70(25)C-UT61-8W		UT61-8(W)	Brushed Aluminum or White		UT95-8		
*UHT70(25)C-UT161-8		UT161-8	White		UT198-8, USE175-4		
*UHT70(25)C-UT164-8		UT164-8	White		UT191-78		
UKT70(25)-2-U51-8		Dual Voice Coil	U51-8		White	70.7V(25V)	U95-8, U96-8
*UKT70(25)-2-U62-8			U62-8		White		U95-8, U96-8
UKT70(25)-2-U161-8	U161-8		White	U198-8, USE175-4			
*UKT70(25)-2-UM222W	UM222(W)		Brushed Aluminum or White	U95-8, U96-8			

* Noted assemblies are available in quantities of 100 or more only.
 ** Recessed enclosures for UL listed loudspeakers are also plenum rated under UL file S1824.

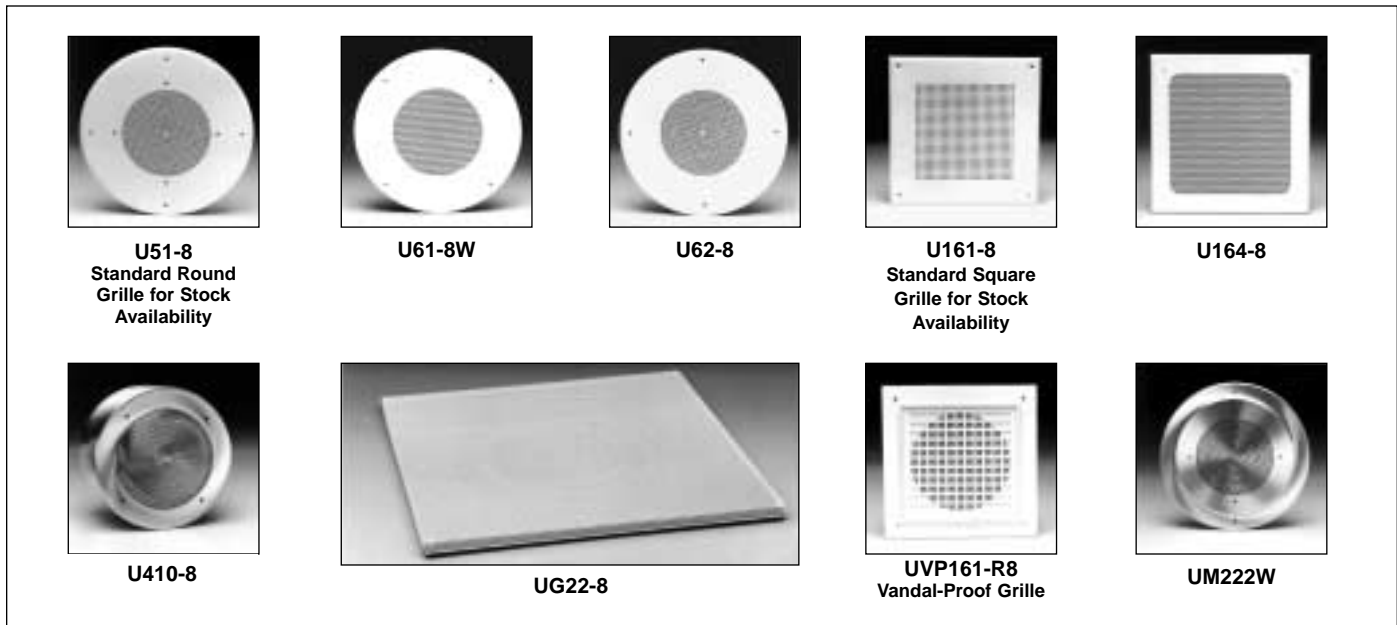

ARCHITECT AND ENGINEER SPECIFICATIONS

UL Listed 8" diameter fire-protective signaling loudspeaker shall be Atlas Sound single voice coil Model _____ (UHT Series) or dual voice coil Model _____ (UKT Series) for supervised service. UHT Series loudspeaker shall consist of a molded fire-retardant/moisture-proof cone, whizzer cone, and 10 oz. ceramic magnet. It shall have a single 1" diameter voice coil and shall be equipped with a (70.7 or 25V) transformer, and a DC blocking capacitor for line super-

vision applications. Dual voice coil Series UKT shall provide for line supervision with dual 1" dia. voice coils, two transformers, and a DC blocking capacitor. Loudspeaker shall be pre-assembled to Atlas Sound, baffle Model _____. Loudspeaker/baffle assembly shall mount to Atlas Sound UL approved companion enclosure Model _____.

Specifications subject to change without notice



Northeast Total Communications

Toll free: (800)-362-7542 Fax: (215)-639-2476 E-mail: info@ntcinc.com