



UL LISTED VOICE/TONE™ EMERGENCY LOUDSPEAKERS

VT/VTF Series



VT Series



VTF Series

FEATURES

- Patented Emergency Loudspeakers Available in 8-Ohm, 70.7V, and 25V Versions
- Units Meet or Exceed UL Standard 1480 for Fire Protective Signaling Systems when Used with Compatible Control Equipment
- Durable, Die-Cast, Water-Sealed Housings Withstand Vandalism, Vermin, Moisture, Corrosion, and Vibration
- Easy and Low Cost Installation Via Standard E.O. Boxes
- Choose from Surface or Recessed Models in Red or Neutral Gray Finish
- All Models Produce High Level Output, Optimum Intelligibility, and Effective Dispersion
- Ideal for Reliable Voice/Tone Signaling in Public Area Emergency Communications and Heavy-Duty Industrial Applications

APPLICATIONS

Employ patented, UL Listed Voice/Tone™ audible signaling devices in protective warning and intercom systems, for public area emergency communications, and as communication system loudspeakers in multi-occupancy and extended space areas (i.e., high-rise residences, public buildings, healthcare and educational facilities, shopping areas, athletic clubs, transportation terminals). All units are suitable for stationary or mobile use, indoors or outdoors. High-power, 15-watt models are ideal for use in commercial and heavy-duty industrial applications.

When used with compatible control equipment, VT/VTF Series comply with UL Standard 1480 (Speakers for Fire Protective Signaling Systems) and California State Fire Marshal (Title 19). Models with special modifications to meet New York City MEA (Calendar no. 57-74-SA) and UL Canada are also available as standard product. Contact factory for proper model designation and price.

GENERAL DESCRIPTION

Through proven performance, patented VT/VTF Series have earned worldwide acclaim for service reliability. These cost-effective units offer compact size, functional flexibility, optimum intelligibility, effective sound distribution, and high-level output. All models contain a high-efficiency compression driver with maximum acoustic conversion efficiency. (A quality which reduces number of units needed to attain specified sound pressure levels and provides substantial savings in amplification-power requirements and labor costs.) Die-cast, water-sealed construction withstands vandalism, vermin, moisture, corrosion, and vibration during indoor or outdoor use. Selection includes a basic 8-ohm version and 70.7 or 25-volt transformer models with DC blocking capacitor (C) where noted. All models terminate via barrier strips. VT Series models are surface-mount units; VTF Series are flush-mount units for recessed installation. VT Series mounts standard 4" E.O. Boxes; VTF Series mount 4" or 4¹/₈" SQ backboxes and require model AR or MR adapter rings respectively (order separately) Optional mounting accessories are offered including: indoor and outdoor enclosures, a bi-directional housing, adapter plates and rings. Suffix model with color: Red (R) or Neutral Gray (N). Ex: VT-157UCS.


Specifications subject to change without notice



Northeast Total Communications

Toll free: (800)-362-7542 Fax: (215)-639-2476 E-mail: info@ntcinc.com

VT / VTF SERIES ACCESSORIES (ORDER SEPARATELY)



SE



SI



TVTA




VTC



SFP



FP



AR



MR

ENCLOSURES

Model SE. Surface-mounting exterior backbox provides weatherproof installation for VT Series loudspeakers. Unit is tapped for 1/2" conduit and includes a weatherproof gasket. Dimensions: 4 1/4" SQ x 2" D (108 x 51mm). Weight is .75 lbs (.35 kg). Housing is die-cast zinc finished in a durable epoxy. Suffix model with color designation: Red (R) or Neutral Gray (N).

Model SI. Surface-mounting indoor backbox for SVT Series models mounts to any single or double-gang backbox for concealed conduit applications. CRS unit includes 1/2" conduit knock-outs (three on each side; five on rear). Epoxy-finished surface. Dimensions: 4" SQ x 1 1/2" D (102 x 38mm). Weight is .7 lbs (.3 kg). Suffix model with color designation: Red (R) or Neutral Gray (N).

Model TVTA. Twin housing for bi-directional mounting of two independently powered VT Series models. Unit is recommended for wall or ceiling installation in corridors and walkways. Each unit includes 2 3/4" D (70mm) housing with base and adapter plate for parallel mounting to any 4" SQ or single-gang electrical backbox for distortion-free, bi-directional projection. Weight is 1.5 lbs (.7 kg). Suffix model with color designation: Red (R) or Neutral Gray (N).

BAFFLE COVER

Model VTC. Baffle cover converts Model TVTA (above) into a uni-directional unit for single loudspeaker installations. Die-cast zinc construction is finished in baked epoxy and is identical to the VT Series loudspeaker housing. Dimensions: 4 1/4" SQ x 1 1/2" D (108mm x 48mm). Weight is .5 lbs (.2 kg). Suffix model with color designation: Red (R) or Neutral Gray (N).

ADAPTER PLATES

Model SFP. Semi-flush adapter plate mounts behind VT Series to cover any recessed 4" SQ x 1 1/2" D (102mm x 38mm) outlet box. CRS wall plate is stamped and painted. Dimensions: 6" SQ x 7/8" D (152mm x 6mm). Weight is .5 lbs (.2 kg). Suffix model with color designation: Red (R) or Neutral Gray (N).

Model FP. Flush adapter plate for VTF Series loudspeakers allows recessed mounting to standard 4 1/8" (119mm) backboxes. Unit is also suited to mount solid exterior or hollow interior wall surfaces where a backbox is not required. Weight is .4 lbs (.18 kg). Unit is of CRS stamped construction; not painted.

ADAPTER RINGS

Model AR. Adapter ring for recessed mounting of VTF Series units. Welded steel collar is 4" SQ x 2" D (103mm x 51mm) to provide necessary extension for any 4" SQ x 2 1/2" D (102mm x 54mm) E.O. box. Weight is .6 lbs (.27 kg). When assembled, the unit is 3 1/8" deep and will fit in a standard 4" stud wall. Assembly includes four "S" clips. Finished in neutral gray.

Model MR. Overlapping extension ring is equipped with clips for recessed mounting of VTF Series models. Welded steel collar is 4 1/8" SQ (I.D.) x 2" D (119mm x 51mm) to provide extension for any 4 1/8" SQ (O.D.) x 2 1/2" D (119mm x 54mm) backbox. When assembled, the unit is 3 3/8" deep and will fit in a standard 4" stud wall. Assembly includes four "S" clips. Weight is .7 lbs (.3 kg). Finished in neutral gray.

Specifications subject to change without notice



Northeast Total Communications

Toll free: (800)-362-7542 Fax: (215)-639-2476 E-mail: info@ntcinc.com


VT/VTF LOUDSPEAKER SPECIFICATIONS

MODEL	TRANSFORMER	POWER TAPS (WATTS)	FREQ. RESP.	DISPERSION	SENSITIVITY	DIMENSIONS / WEIGHT	CAPACITOR (C)
VT(F)-158U	*	15 (8 Ohms)	600 Hz - 5500 Hz (± 5dB)	> 190° (- 6dB pt., 1 and 2 kHz octave bands)	96.9dB	4-1/4" SQ x 3-1/4" D (108 x 83mm) 3.2 Lbs. (1.5 kg) VTF Series: 6" SQ x 3-1/4" D (152 x 83mm) 3.2 Lbs. (1.5 kg)	N.A.
VT(F)-157UC	70.7 V	15, 8, 4, 2			5 mfd.		
VT(F)-152UC	25 V	15, 8, 4, 2			5 mfd.		
VT(F)-27UC	70.7 V	2, 1			1 mfd.		
VT(F)-22UC	25V	2, 1			1 mfd.		
VT(F)-17UC	70.7	1, 1/2, 1/4	1 mfd.				

* Without transformer, 8-ohm impedance. ** 3dB increment rating.

**SOUND LEVEL REFERENCE INDEX FOR VT AND VTF SERIES LOUDSPEAKERS
(BASED ON UL RATING OF 90dB AT 1 WATT, 10 FEET)**

DISTANCE	15-W INPUT	8-W INPUT	4-W INPUT	2-W INPUT	1-W INPUT	1/2-W INPUT	1/4-W INPUT
10' (3.0 m)	102.0dB	99.0dB	96.0dB	93.0dB	90.0dB	87.0dB	84.0dB
20' (6.1 m)	96.0dB	93.0dB	90.0dB	87.0dB	84.0dB	81.0dB	78.0dB
30' (9.1 m)	92.5dB	89.5dB	86.5dB	83.5dB	80.5dB	77.5dB	74.5dB
40' (12.2 m)	90.0dB	87.0dB	84.0dB	81.0dB	78.0dB	75.0dB	72.0dB
50' (15.2 m)	87.7dB	84.7dB	81.7dB	78.7dB	75.7dB	72.7dB	69.7dB

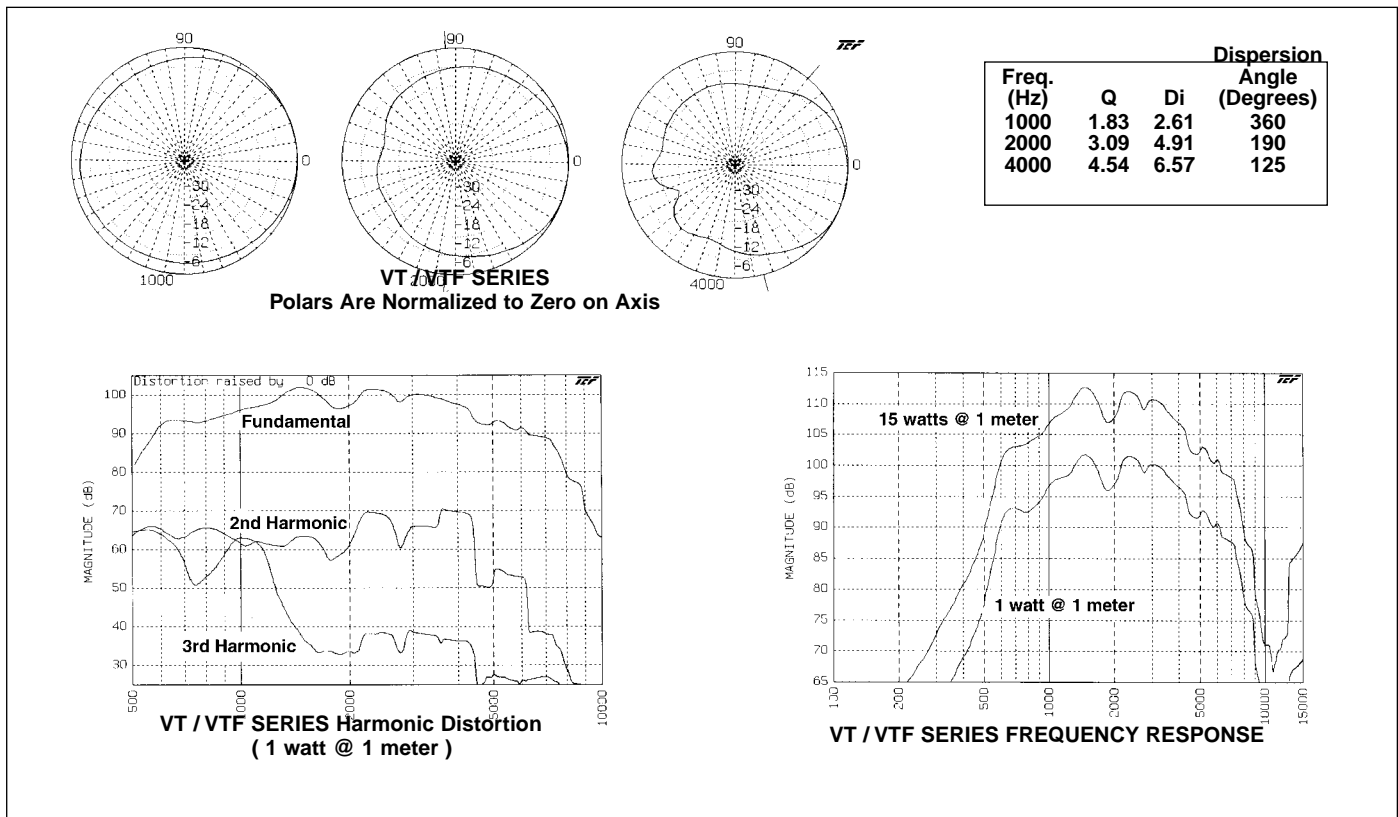

ARCHITECT AND ENGINEER SPECIFICATIONS

VT/VTF Series. Audible signalling device shall be Atlas Sound Model VT-____ (surface mount) or VTF-____ (flush-recessed mount). Continuous power rating shall be ____ (15, 8, 4, 2, 1, 1/2, 1/4 watts) at rated power. Frequency response shall be 600 to 5500 Hz (± 5dB). Sensitivity shall be 96.9dB (at 1 watt, 1 meter). Sound pressure level shall be ____ at a distance of ____ (see Sound Level Reference Index). Dispersion shall be greater than 190° (-6dB point, 1 and 2 kHz octave bands). Model shall be water/moisture sealed and constructed of die-cast zinc. Unit shall operate within the temperature

range of 150°F (66°C) to -30°F (-35°C). VT Series shall be installed in ____ (a standard 4" SQ E.O. Box, Atlas Sound Model SFP semi-flush plate, Model SE surface exterior backbox, or Models TVTA and VTC bi-directional housing and baffle cover). VTF Series shall be installed in a standard ____ (4" or 4-11/16" SQ) backbox using Atlas Sound Model ____ (AR, MR) overlapping extension ring. Dimensions shall be: VT Series, 4-1/4" SQ. x 3-1/4" D (108 x 83mm); VTF Series, 6" SQ. x 3-1/4" D (152 x 83mm). Finish shall be red or neutral gray.




Northeast Total Communications


VT/VTF SERIES UL WIRING REQUIREMENTS

NOTE: To conform with UL1480 requirements, wires must be connected to appropriate terminals as shown in the wiring diagram. **Do NOT** use looped wire under terminals. Break wire run to provide for supervision of connection.

VT/VTF MODELS WITH 2 POSITION TERMINAL STRIP

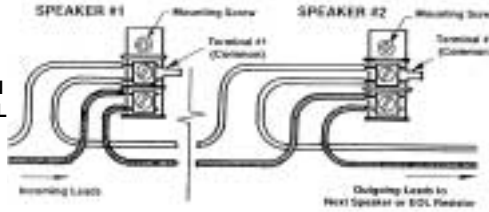

VT MODELS WITH 3, 4, OR 5 POSITION TERMINAL STRIP



VT/VTF-17U VT/VTF-17UC			VT/VTF-22U VT/VTF-22UC			VT/VTF-27U VT/VTF-27UC			VT/VTF-152U VT/VTF-152UC			VT/VTF-157U VT/VTF-157UC 70V			VT/VTF-158U				
70V Line Xfmr			25V Line Xfmr			70V Line Xfmr			25V Line Xfmr			70 V Line Xfmr			8 ohms				
Term	Color	Watt Rating*	dB	Term	Color	Watt Rating*	dB	Term	Color	Watt Rating*	dB	Term	Color	Watt Rating*	dB	Term	Color	Watt Rating*	dB
1	Red	Com	-	1	Red	Com	-	1	Red	Com	-	1	Wht	Com	-	1	Blk	Com	-
2	Blu	1/4	84	2	Blu	1	87	2	Blu	1	90	2	Red	2	90	2	Red	2	90
3	Yel	1/2	87	3	Wht	2	90	3	Wht	2	93	3	Gry	4	93	3	Gry	4	93
4	Wht	1	90					4	Brn	8	96	4	Brn	8	96	4	Brn	8	96
								5	Grn	15	99	5	Grn	15	99				

* UL 3dB Increment Rating

VT SERIES UL LISTED VOICE/TONE™ EMERGENCY LOUDSPEAKER INSTALLATION

(* Backboxes by others)

Surface Interior Backbox (SI)

SURFACE OR CONCEALED CONDUIT MOUNTING

VT Series with Model SI backbox.

SURFACE EXTERIOR BACKBOX (SE)

WEATHERPROOF MOUNTING

VT Series with Model SE for weatherproof installations.

SEMI-FLUSH PLATE (SFP)

Do not use these five knockouts for connecting conduit (will interfere with the loudspeaker).

SEMI-RECESSED MOUNTING

VT Series with Model SFP installed to any recessed 4" SQ x 2-1/8" D backbox*.

BI-DIRECTIONAL HOUSING (TVTA) / BAFFLE COVER (VTC)

BI-DIRECTIONAL MOUNTING

Two independently powered VT units installed into Model TVTA. Mounts to any 4" SQ or single gang E.O. Box* for ceiling or wall installations. (To build a uni-directional unit for single loudspeaker installations, use a VT loudspeaker on one end and a VTC baffle cover on the other.)

VTF SERIES UL LISTED VOICE/TONE™ EMERGENCY LOUDSPEAKER INSTALLATION

(* Backboxes by others.)

ADAPTER RING (AR)

Do not use these five knockouts for connecting conduit (will interfere with the loudspeaker)

RECESSED MOUNTING OPTION

VTF Series with standard 4" SQ x 2-1/8" D backbox* & Model Adapter Ring (AR).

* A Standard 2-1/8" D backbox assembled with overlapping extension ring (AR) is 3-11/16" Deep.

FLUSH MOUNTING PLATE (FP) / ADAPTER RING (MR)

RECESSED MOUNTING OPTIONS

FP Mounting Plate Dimensions

VTF Series with Model FP mounted to solid exterior (or hollow interior) wall where backbox is not required.

MR Ext. Ring Dimensions

VTF Series with standard 4-11/16" SQ x 2-1/8" D backbox* and overlapping extension ring (MR). Flush plate (FP) required for loudspeaker alignment.

* A standard 2-1/8" D backbox assembled with overlapping extension ring (MR) is 3-11/16" D.

Specifications subject to change without notice



Northeast Total Communications

Toll free: (800)-362-7542 Fax: (215)-639-2476 E-mail: info@ntcinc.com



UL LISTED VOICE/TONE™ EMERGENCY LOUDSPEAKERS

SVT/SVTF



SVT Series



SVTF Series

FEATURES

- Patented Emergency Loudspeakers Available in 8-Ohm, 70.7V, and 25V Versions
- Offers a Durable, Environment-Resistant Assembly and Weather-Sealed Noryl™ Plastic Housing
- Units Meet or Exceed UL Standard 1480 when Used with Compatible Control Equipment
- Easy and Low-Cost Installation Via Standard E.O. Boxes
- Choose from Surface or Recessed Models in Red or Neutral Gray Finish
- Ideal for Reliable Voice/Tone Signaling in Localized Area Applications
- Suitable for Protective Security, Commercial Sound, Intercom, and Emergency Evacuation
- Applications in New and Retrofit Installations
- Re-entrant Dome Creates Reflective Sound Path for Maximum Output and Protection of Cone Loudspeaker

APPLICATIONS

Utilize UL Listed Voice/Tone™ loudspeaker/signaling devices in localized area applications for audio evacuation, emergency communications, and electro-acoustic signalling. The models with 2-watt power handling are intended for use in low ambient-noise areas (i.e., high-rise residences, executive offices, hotel rooms, hospital suites). Units with 7.5-watt power handling are suited for areas requiring medium sound output coverage (i.e., hallways, stairwells, classrooms, offices, stores, restaurants, healthcare facilities). All units are acceptable for stationary or mobile use, indoors and outdoors.

When used with compatible control equipment, SVT/SVTF Series comply with UL Standard 1480 (Speakers for Fire Protective Signaling Systems) and California State Fire Marshal (Title 19). Models with special modifications to meet New York City MEA (Calendar no. 57-74-SA) and UL Canada are also available as standard product. Contact factory for proper model designation and price.

GENERAL DESCRIPTION

These cost-effective, weather-resistant, surface and flush-mount loudspeakers have earned worldwide recognition for service reliability. Units offer compact size, functional flexibility, optimum intelligibility, and effective sound dispersion. They are ideal for relaying emergency voice communication and multiple tone signals in commercial, residential, and industrial use. Units feature a cone speaker with an integral re-entrant protective dome built into the housing for optimum power output and high intelligibility.

Specially treated loudspeaker assembly with durable, weather-sealed Noryl™ plastic housing resists moisture, heat, corrosion, vibration, and vermin during indoor or outdoor use. Selection includes basic 8-ohm version and 70.7 or 25-volt transformer models with DC blocking capacitor (C). All units terminate via 6" color-coded leads.

SVT Series models are surface-mount units; SVTF Series are flush-mount units for recessed installation. SVT Series mount standard 4" SQ E.O. Boxes using semi-flush mounting plate (SFP); VTF Series mount 4¹/₁₆" SQ backboxes using a standard drawn-type extension ring (including Raco #262) or Model MR adapter ring (order separately). Suffix model with color: Red (R) or Neutral Gray (S). Ex: SVT-77UCR. Optional mounting accessories are offered including indoor and outdoor enclosures, and a bi-directional housing.

SIX



Northeast Total Communications

Toll free: (800)-362-7542 Fax: (215)-639-2476 E-mail: info@ntcinc.com

319

SVT / SVTF SERIES ACCESSORIES (ORDER SEPARATELY)

ENCLOSURES

Model SE. Surface-mounting exterior backbox provides weatherproof installation for SVT Series loudspeakers. Unit is tapped for 1/2" conduit and includes a weatherproof gasket. Dimensions: 4 1/4" SQ x 2" D (108mm x 51mm). Housing is die-cast zinc finished in a durable epoxy. Weight is .75 lbs (.35 kg). Suffix model with color designation: Red (R) or Neutral Gray (N).






Model SI. Surface-mounting indoor backbox for SVT Series models mounts to any single or double-gang backbox for concealed conduit applications. CRS unit includes 1/2" conduit knock-outs (three on each side; five on rear). Epoxy-finished surface. Dimensions: 4" SQ x 1 1/2" D (102mm x 38mm). Weight is .7 lbs (.3 kg). Suffix model with color designation: Red (R) or Neutral Gray (N).

Model TVTA. Twin housing for bi-directional mounting of two independently powered SVT Series models. Unit is recommended for wall or ceiling installation in corridors and walkways. Each unit includes 2 3/4" D (70mm) housing with base and adapter plate for parallel mounting to any electrical backbox for distortion-free, bi-directional projection. Weight is 1.5 lbs (.7kg). Suffix model with color designation: Red (R) or Neutral Gray (N).

ADAPTER PLATE AND EXTENSION RING

Model SFP. Semi-flush adapter plate mounts behind SVT Series to cover any recessed 4" SQ x 1 1/2" D (102mm x 38mm) outlet box. CRS wall plate is stamped and painted. Dimensions: 6" SQ x 1/2" D (152mm x 6mm). Weight is .5 lbs (.2kg). Suffix model with color designation: Red (R) or Neutral Gray (N).

Model MR. Overlapping extension ring is equipped with clips for recessed mounting of SVTF Series models. Welded steel collar is 4 1/16" SQ (I.D.) x 2" D (119mm x 51mm) to provide extension for any 4 1/16" SQ (O.D.) x 2 1/8" D (119mm x 54mm) backbox. Weight is .7 lbs (.3 kg). Finished in neutral gray.

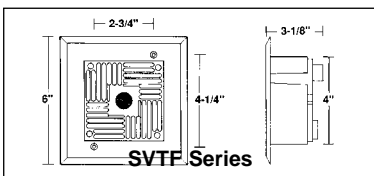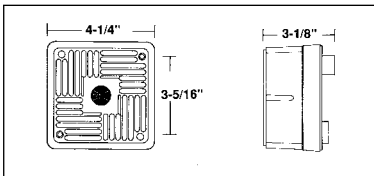

Specifications subject to change without notice



Northeast Total Communications

Toll free: (800)-362-7542 Fax: (215)-639-2476 E-mail: info@ntcinc.com


SVT/SVTF LOUDSPEAKER SPECIFICATIONS

MODEL	TRANSFORMER	POWER TAPS (WATTS)	FREQ. RESP.	DISPERSION	SENSITIVITY	DIMENSIONS / WEIGHT	CAPACITOR (C)
SVT(F)-78U	*	7.5	500 Hz - 5000 Hz (±5dB)	>140° (-6dB point, 1 and 2 kHz octave bands)	96dB (1 watt, 1 meter)	SVT: 4 1/4" SQ x 3 3/8" D (108 x 80mm) 3.25 lbs (1.5 kg)	N.A.
SVT(F)-77UC	70.7 V	7.5, 4, 2, 1					3 mfd.
SVT(F)-72UC	25 V	7.5, 4, 2, 1					3 mfd.
SVT(F)-27UC	70.7 V	2, 1, 1/2, 1/4			UL: 87dB**	SVTF: 6" SQ x 3 3/8" D (152 x 80mm) 1.5 lbs (.7 kg)	1 mfd.
SVT(F)-22UC	25 V	2, 1, 1/2			(1 watt, 10 feet)		3 mfd.

* Without transformer, 8-ohm impedance. ** 3dB increment rating.


**SOUND LEVEL REFERENCE INDEX FOR SVT AND SVTF SERIES LOUDSPEAKERS
(BASED ON UL RATING OF 87dB AT 1 WATT, 10 FEET)**

DISTANCE	7.5-W INPUT	4-W INPUT	2-W INPUT	1-W INPUT	1/2-W INPUT	1/4-W INPUT
10' (3.0 m)	96.0dB	93.0dB	90.0dB	87.0dB	84.0dB	81.0dB
20' (6.1 m)	90.0dB	87.0dB	84.0dB	81.0dB	78.0dB	75.0dB
30' (9.1 m)	86.5dB	83.5dB	80.5dB	77.5dB	74.5dB	71.5dB
40' (12.2 m)	84.0dB	81.0dB	78.0dB	75.0dB	72.0dB	69.0dB
50' (15.2 m)	81.7dB	78.7dB	75.7dB	72.7dB	69.7dB	66.7dB

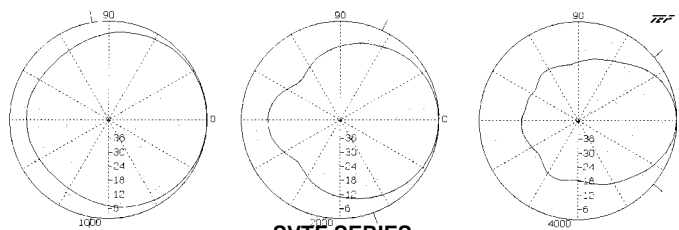


SVTF SERIES
Polars Are Normalized to Zero on Axis

Freq. (Hz)	Q	Di	Dispersion Angle (Degrees)
1000	2.49	3.96	200
2000	4.54	6.57	135
4000	9.97	9.99	80

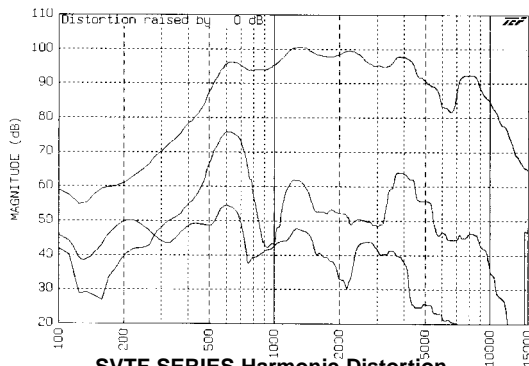

SVTF SERIES Harmonic Distortion
(1 watt @ 1 meter)

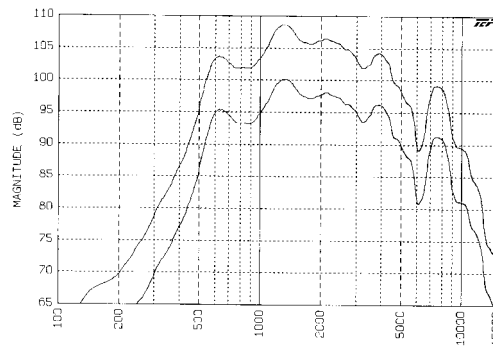

SVTF SERIES FREQUENCY RESPONSE

ARCHITECT AND ENGINEER SPECIFICATIONS

SVT/SVTF Series. Environment-resistant loudspeaker shall be Atlas Sound Model SVT-____ (surface mount) or SVTF-____ (flush-recessed mount). Continuous power rating shall be ____ (7.5, 4, 2, 1, 1/2 watts) at rated power. Frequency response shall be 500 to 5000 Hz (±5dB). Sensitivity shall be 96dB (at 1 watt, 1 meter). Sound pressure level shall be ____ at a distance of ____ (see Sound Level Reference Index). Dispersion shall be greater than 140° (-6dB point, 1 and 2 octave bands). Housing shall be water/moisture sealed and constructed of Noryl™ plastic. Unit shall operate within the tempera-

ture range of 150°F (66°C) to -30°F (-35°C). SVT Series shall be installed in ____ (a standard recessed 4" SQ E.O. Box with Atlas Sound Model SFP semi-flush plate, Model SE surface exterior backbox, or Model TVTA bi-directional housing). SVTF Series shall be installed in a standard 4 1/8" SQ backbox using ____ (Atlas Sound Model MR overlapping extension ring or drawn-type extension ring). Dimensions shall be: SVT Series, 4 1/4" Sq. x 3 3/8" D (108mm x 80mm); SVTF Series, 6" Sq. x 3 3/8" D (152mm x 80mm). Finish shall be red or neutral gray.



Northeast Total Communications


Toll free: (800)-362-7542 Fax: (215)-639-2476 E-mail: info@ntcinc.com

INSTALLATION INSTRUCTIONS

SVT / SVTF SERIES UL WIRING REQUIREMENTS

NOTE: To conform with UL1480 requirements, wires must be connected to appropriate terminals as shown in the wiring diagram

Do NOT use looped wire under terminals. Break wire run to provide for supervision of connection.

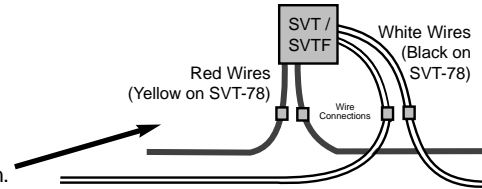

SVT(F)-22 2W, 25 V Xfmr
Secondary tap- 8 Ohms
Primary taps:

Watt	Ohm	dB Rating*
0.5	1250	84
1	625	87
2	312	90

SVT(F)-27 2W, 70.7 V Xfmr
Secondary tap- 8 Ohms
Primary tap:

Watt	Ohm	dB Rating*
0.25	20,000	81
0.5	10,000	84
1	5,000	87
2	2,500	90

SVT(F)-72 7.5W, 25 V Xfmr
Secondary tap- 8 Ohms
Primary tap:

Watt	Ohm	dB Rating*
1	625	87
2	312	90
4	156	93
7.5	83	96

SVT(F)-77 7.5W, 70 V Xfmr
Secondary tap- 8 Ohms
Primary tap:


Watt	Ohm	dB Rating*
1	5,000	87
2	2,500	90
4	1,200	93
7.5	666	96

SVT(F)-78 8 ohms

Watt	Ohm	dB Rating*
7.5	8	96


* UL 3dB Increment Rating

SVT SERIES UL LISTED VOICE/TONE™ EMERGENCY LOUDSPEAKER INSTALLATION





WEATHER-PROOF MOUNTING

SVT Series with Model SE for weatherproof installations.

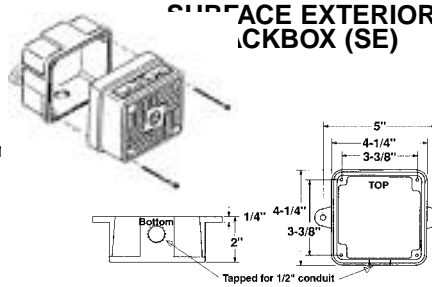


SURFACE INTERIOR BACKBOX (SI)



SURFACE OR CONCEALED CONDUIT MOUNTING

SVT Series with Model SI backbox.


SEMI-FLUSH PLATE (SFP)

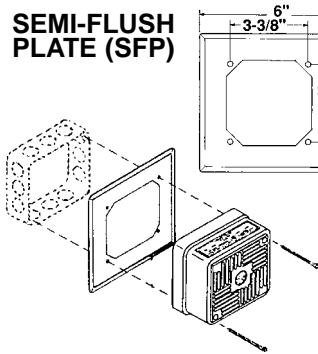

SEMI-RECESSED MOUNTING

SVT Series with Model SFP installed to any recessed 4" Sq. x 1 1/2" D (or 2 1/2" D) backbox (by others).


BI-DIRECTIONAL HOUSING (TVTA)

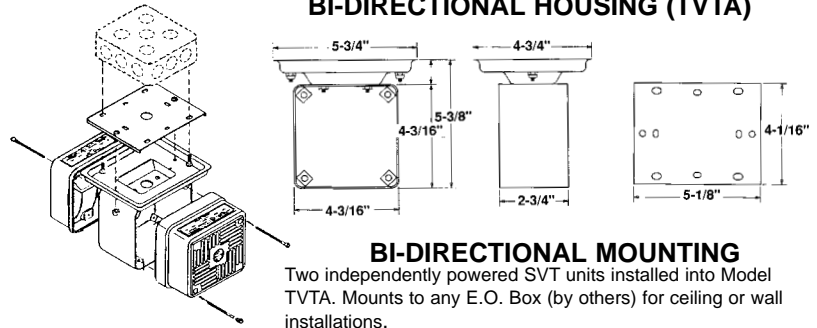


BI-DIRECTIONAL MOUNTING

Two independently powered SVT units installed into Model TVTA. Mounts to any E.O. Box (by others) for ceiling or wall installations.


SVTF SERIES UL LISTED VOICE/TONE™ EMERGENCY LOUDSPEAKER INSTALLATION

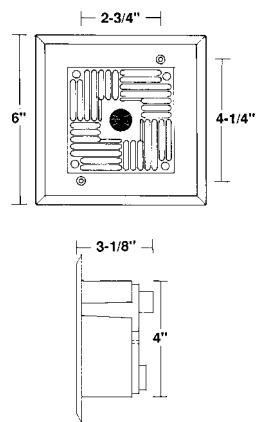


STANDARD BACKBOX AND EXTENSION RING (by others)



RECESSED MOUNTING OPTION
SVTF Series with standard 4 1/8" SQ x 1 1/2" D backbox (by others) and Raco #262 2 1/2" drawn-type extension ring. (Note: Welded or folded-type extension rings may not be used.)



A Standard 2 1/8" D backbox (by others) assembled with overlapping extension ring (MR) is 3 1/8" Deep.

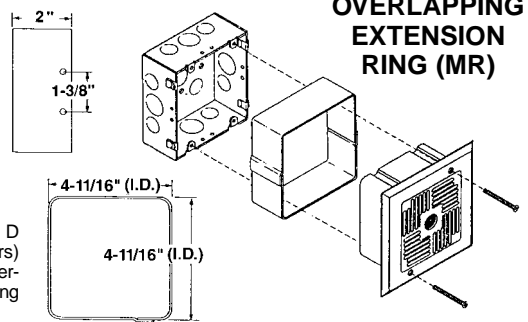

RECESSED MOUNTING OPTION

SVTF Series with standard 4 1/8" SQ x 2 1/8" D backbox (by others) and overlapping extension ring Model MR. Model MR is supplied with fastening clips.

Specifications subject to change without notice



Northeast Total Communications

Toll free: (800)-362-7542 Fax: (215)-639-2476 E-mail: info@ntcinc.com