



## RACK CABINET, WELDED STAND ALONE WITH ADJUSTABLE RAILS - FMA SERIES

FMA Series  
Stand Alone Cabinets  
FMA77-25SA-962  
FMA61-25SA-962



FMA Series (Stand Alone) Cabinets



Increased vent space on top sections

- Available in the most popular heights & depths
- Designed with Contractor input to meet storage and wire management needs for today and into the future
- Increased width for better wire management
- Rear door included
- 14 gauge tops/bottoms/frames
- 16 gauge side panels
- Hat sections are completely re-designed with rail slot and retainer hole for extra strength
- Return added for "stop" when flush mount doors are utilized
- 12/14 gauge reinforced caster mounting area (no separate mounting plate required and castors designed to not add substantial height)
- Two pairs of 11 gauge CRS adjustable mounting rails plated, drilled and tapped 10-32 with hash marks to indicate rack unit increments.
- Slots in rack rails for cable pass-through and front door hinge access (SM doors)
- Leg Levelers Included
- Holes for optional surface doors are pre-drilled & plugged
- Hat sections sized to facilitate standard 19" panels -handy for mounting "stick-on" modules and other hardware
- Slots maintained in hat sections for wire management
- Knock outs on removable standard 2U panels (rear of cabinet top & bottom). Panel includes 3/8" KOs for BNC connectors (perfect for diversity wireless systems)
- Increased vent space on top sections—use Atlas Sound fan panels or 5000 series top panels
- Stocked in scratch resistant textured black (-962)
- Other convenience, cooling and electronic accessories are available
- 2RU panel on bottom for cable pass-through between cabinets
- UL listing pending & seismic rating pending

### APPLICATIONS

The Atlas Sound FMA series of vertical cabinets offer the flexibility of designing modular configurations to match specific installation needs. Superior wire management designs make them ideal for single configurations. Designed for a high strength-to weight ratio, these racks are built to E.I.A. Specifications. Standard #EIA-310-C meets most OEM, commercial, and military requirements. All are commonly used to house electronic, communications, computer, security, and switching equipment in commercial, industrial and institutional applications.

### GENERAL DESCRIPTION

The new Atlas Sound FMA (Folded Metal Assembly) design incorporates an innovative "Radius" look characterized by sleek curved corners and seamless joints. This new look blends effortlessly in today's ergonomically designed office environment. A wider footprint of over 24" offers installers the luxury of more available working space, particularly valuable in wire management applications where space is often inherently limited.


All units feature 14 gauge steel tops/bottoms and 16 gauge steel welded and assembled side panels. A flush mount 16 gauge steel rear door with integral "stop" to prevent over-travel is included as standard.

*Specifications subject to change without notice*




# Northeast Total Communications

Toll free: (800)-362-7542 Fax: (215)-639-2476 E-mail: info@ntcinc.com

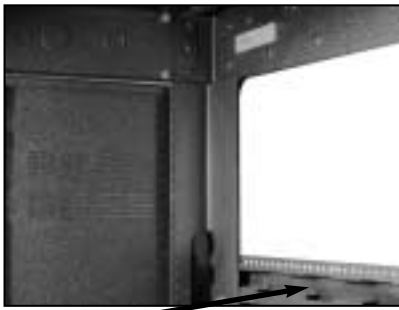


Hat section features integrated provision for clean wire management

Hash marks on rails indicate RU increments

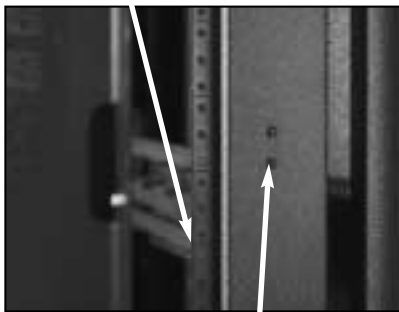

Holes for surface doors are pre-drilled and plugged

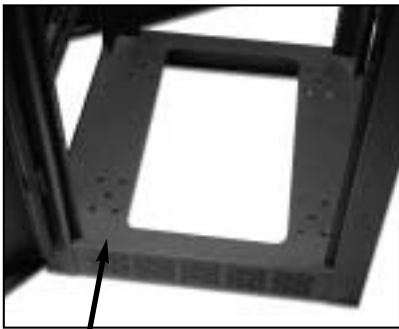

Reinforced casters mounting area (no separate mounting pedestal required)

The Atlas Sound FMA series features completely re-designed "hat" sections for added strength & greater versatility in rack rail positioning. The hat sections include a rack rail slot along with holes spaced the entire length of the hat section to allow for easy, secure positioning of the rack rails. This newly designed hat section is also spaced in the cabinet to allow the installation of standard 19" blank panels vertically inside the cabinet. This is perfect for "stick-on" type accessories like Atlas Sound DC power supplies & relays. Hat sections also feature slotted cut-outs for clean, organized wire management.

For optimum wire management, unique, removable 2RU high panels are positioned behind cutouts at the top & bottom on the rear of the cabinet. These panels include a variety of knockouts ranging in size from 3/8" to 1 1/4" to facilitate rigid or flexible conduit. 3/8" knockouts (x2) are also included on this panel to allow installation of BNC connectors commonly used for diversity wireless microphone systems. The cabinet top sections offer large, vented openings for maximum ventilation. This comes in especially handy when thermal sensitive amplifiers and/or digital rack mount equipment are mounted in a FMA cabinet.

Leg levelers are included with the FMA series at no additional cost to provide perfect alignment regardless of floor evenness but in instances where maneuverability of the cabinet is required, the optional FMA-CASTERKIT allows easy positioning without significantly increasing the cabinet's overall height. Extra reinforcement is included on the cabinet bottom eliminating the need for extra reinforcement in the caster mounting locations.

Cabinets include two pair (front/back) 11 gauge plated steel rack rails tapped 10-32 and include the new Atlas Sound RU indicators to aid in aligning equipment during installation. Holes are also provided in the rack rail to allow access to front door hinge locations when mounting surface mount doors. These hinge locations are pre-drilled & plugged on the front of the cabinet to save installation time when a front door is required for the cabinet.

UL listing & seismic rating pending.

## OPTIONAL ACCESSORIES

### FMA-CASTERKIT

Includes (2) locking swivel and (2) rigid casters with mounting hardware

### Perforated top panels

TPP-19-25-962 – Matches FMA77-25G-962

TPP-19-30-961 – Matches FMA77-30G-962

### Solid top panels

TPS-19-25-962 – Matches FMA77-25G-962

TPS-19-30-962 – Matches FMA77-30G-962

### High power top mounting fan kits

EFT19-25-962 – Matches FMA77-25G-962

EFT19-30-962 – Matches FMA77-30G-92

MODEL	Rack Rail to Perforated Front Door Clearance (with front rack rail in forward-most position)*	Overall Usable Mounting Depth (front rail face to rear rail face with rails at full front extension front to back)	Front Rack Rail to Rear Door Clearance (with front rack rail in farthest forward position)
FMA77-25SA-962	1.5" (38mm)	24.24" (616mm)	24.875" (632mm)
FMA61-25SA-962	1.5" (38mm)	24.24" (616mm)	24.875" (632mm)



\* Does not account for 3.5" area in center of cabinet where door handle and lock could cause interference with equipment knobs if rack rails are located fully forward.

Specifications subject to change without notice




# Northeast Total Communications


Toll free: (800)-362-7542 Fax: (215)-639-2476 E-mail: info@ntcinc.com

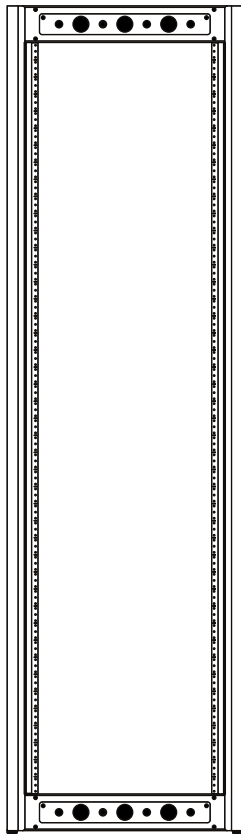


BACK VIEW

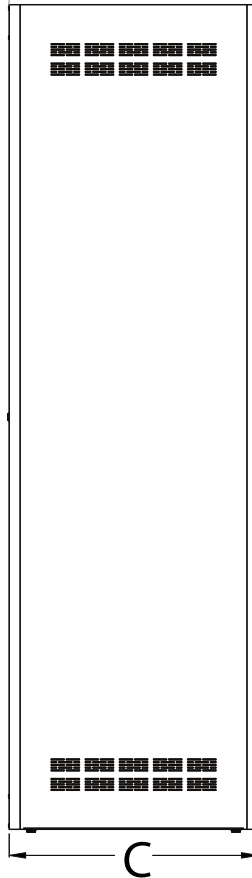


SIDE VIEW

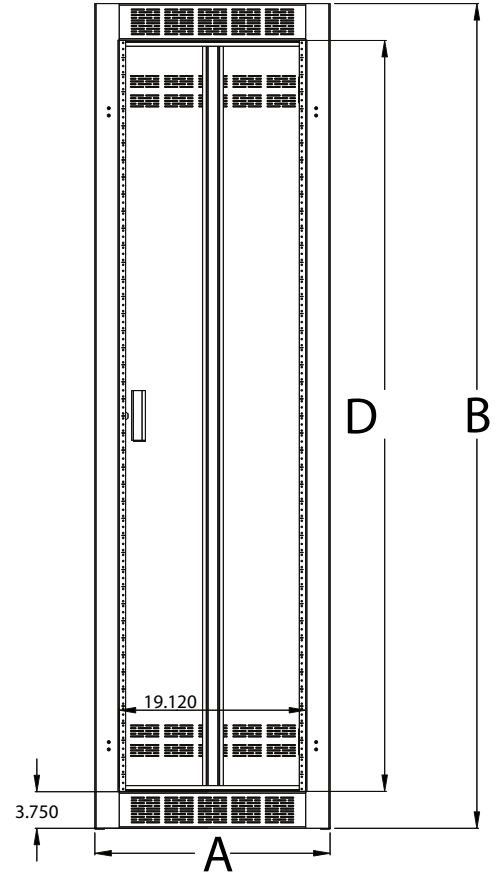

FRONT VIEW

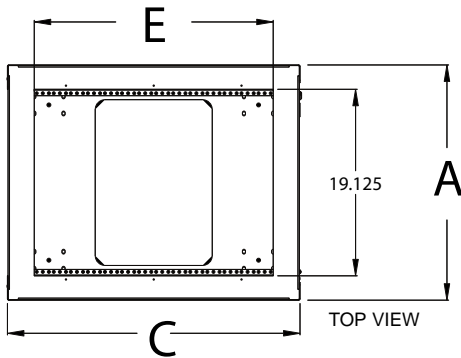

TOP VIEW

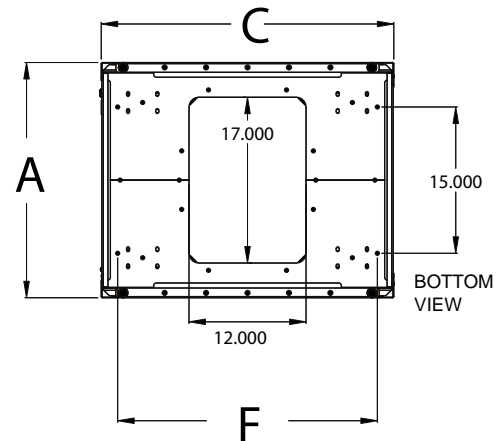

BOTTOM VIEW

MODEL STAND ALONE (SA)	OUTSIDE DIMENSION			PANEL SPACE (D)	TOP PANEL OPENING (E)	FLOOR MOUNTING HOLE LOCATION (F)	OPTIONAL PERFORATED SURFACE MOUNT FRONT DOOR	OPTIONAL CASTER KIT
	WIDTH (A)	HEIGHT (B)	DEPTH (C)					
FMA77-25SA-962	24.125 (612MM)	84.5" (2147MM)	25.5" (648MM)	77.125 (1959MM)	21.0625 (535M)	22.125 (562MM)	FMA77-SDV-962	FMA-CASTERKIT
FMA61-25SA-962	24.125 (612MM)	68.8125" (1748MM)	25.5" (648MM)	61.375" (1559MM)	21.0625 (535M)	22.125 (562MM)	FMA61-SDV-962	

Specifications subject to change without notice



Northeast Total Communications

Toll free: (800)-362-7542 Fax: (215)-639-2476 E-mail: info@ntcinc.com

## ARCHITECT AND ENGINEER SPECIFICATIONS

FMA SERIES. Equipment rack shall be Atlas Sound Model \_\_\_\_\_. It shall be 14 gauge CRS frame with 14 gauge top and bottom sections, 16 gauge side panels and include two pairs of 11 gauge CRS adjustable mounting rails plated, drilled and tapped 10-32 with hash marks to indicate rack unit increments. Bottom section shall be reinforced with 12 gauge stiffeners front to back. Base to be tapped to accept factory installed leg levelers and punched to accept optional casters. Cabinet depth shall be \_\_\_\_\_. Frame shall be finished in -962 black powder coat epoxy.

Racks shall be provided with 16 gauge CRS solid or perforated top panel Model\_\_\_\_, -962.

Racks shall be provided with 550 CFM top mounting fan panel Model\_\_\_\_ -962.

Door(s) shall be 16 gauge CRS frame with perforated steel inserts for maximum ventilation and visibility model FMA77-SDV-962. Doors shall include cylinder lock, handle and shall be hinged (right, left).

Model\_\_\_\_. Single frame and/or entire installation shall be on casters Model FMA-CASTERKIT.

*Specifications subject to change without notice*



**Northeast Total Communications**

Toll free: (800)-362-7542 Fax: (215)-639-2476 E-mail: info@ntcinc.com




## RACK, HEAVY DUTY 14 GAUGE GANGABLE WITH ADJUSTABLE RAILS - FMA SERIES

FMA Series  
Gangable Cabinets  
FMA77-30G-962  
FMA77-25G-962



FMA Series (gangable) Cabinets

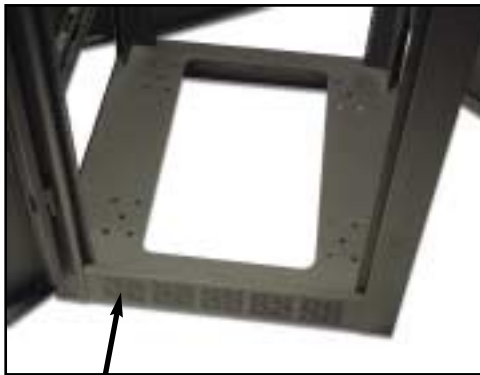

Reinforced caster mounting area  
(no separate mounting pedestal  
required)

### FEATURES

- Available in the most popular heights & depths
- Designed with Contractor input to meet storage and wire management needs for today and into the future
- Increased width for better wire management
- Rear door included
- 14 gauge tops/bottoms/frames
- 16 gauge side panels
- Hat sections are completely redesigned with rail slot and retainer hole for extra strength
- Return added for "stop" when flush mount doors are utilized
- 12/14 gauge reinforced caster mounting area (no separate mounting plate required and castors designed to not add substantial height)
- Two pairs of 11 gauge CRS adjustable mounting rails plated, drilled and tapped 10-32 with hash marks to indicate rack unit increments.
- Slots in rack rails for cable pass-through and front door hinge access (SM doors)
- Leg levelers included
- Holes for optional surface doors are pre-drilled & plugged
- Hat sections sized to facilitate standard 19" panels -handy for mounting "stick-on" modules and other hardware
- Slots maintained in hat sections for wire management
- Knock outs on removable standard 2U panels (rear of cabinet top & bottom) Panel includes 3/8" KOs for BNC connectors (perfect for diversity wireless systems)
- Increased vent space on top sections—use Atlas Sound fan panels or 5000 series to panels
- Stocked in scratch resistant textured black (-962)
- Other convenience, cooling and electronic accessories are available
- 2RU panel on bottom for cable pass-through between cabinets
- New lift-off, locking side panels—"swing-out" design facilitates easy service access
- Reinforced stiffeners on all side panels
- Holes for ganging hardware pass through (joins racks)
- UL listing & seismic rating pending

### APPLICATIONS

The Atlas Sound FMA series of vertical cabinets offer the flexibility of designing modular configurations to match specific installation needs. Superior wire management designs make them ideal for single and multi-bay configurations where easy accessibility to wiring in and between racks is desirable. Designed for a high strength-to weight ratio, these racks are built to E.I.A. Specifications. Standard #EIA-310-C meets most OEM, commercial, and military requirements. All are commonly used to house electronic, communications, computer, security, and switching equipment in commercial, industrial and institutional applications.

### GENERAL DESCRIPTION

The new Atlas Sound FMA (Folded Metal Assembly) design incorporates an innovative "Radius" look characterized by sleek curved corners and seamless joints. This new look blends effortlessly in today's ergonomically designed office environment. A wider footprint of over 24" offers installers the luxury of more available working space, particularly valuable in wire management applications where space is often inherently limited.


All units feature 14 gauge steel tops/bottoms and frames. A flush mount 16 gauge steel rear door with integral "stop" to prevent over-travel is included as standard.

*Specifications subject to change without notice*




## Northeast Total Communications

Toll free: (800)-362-7542 Fax: (215)-639-2476 E-mail: info@ntcinc.com

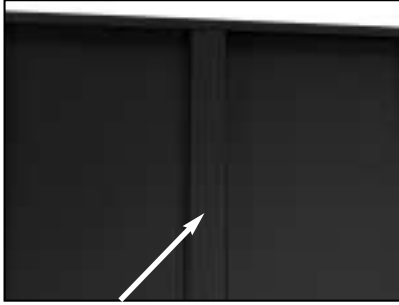

**Reinforced stiffeners on all side panels.**

**Lift-off locking side panels—"swing-out" design facilitates easy service access**

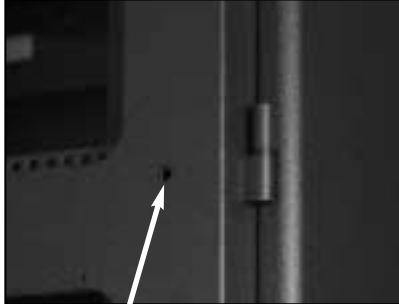

**Pre-drilled holes for joining multiple cabinets to be connected or ganged**



**Increased vent space on top sections**



**Hat section features integrated provision for clean wire management**

The Atlas Sound FMA series features completely re-designed "hat" sections for added strength & greater versatility in rack rail positioning. The hat sections include a rack rail slot along with holes spaced the entire length of the hat section to allow for easy, secure positioning of the rack rails. This newly designed hat section is also spaced in the cabinet to allow the installation of standard 19" blank panels vertically inside the cabinet. This is perfect for "stick-on" type accessories like Atlas Sound DC power supplies & relays. Hat sections also feature slotted cut-outs for clean, organized wire management.

For optimum wire management, unique, removable 2RU high panels are positioned behind cutouts at the top & bottom on the rear of the cabinet. These panels include a variety of knockouts ranging in size from 3/8" to 1 1/4" to facilitate rigid or flexible conduit. 3/8" knockouts (x2) are also included on this panel to allow installation of BNC connectors commonly used for diversity wireless microphone systems. The cabinet top sections offer large, vented openings for maximum ventilation. This comes in especially handy when thermal sensitive amplifiers and/or digital rack mount equipment are mounted in a FMA cabinet.

Leg levelers are included with the FMA series at no additional cost to provide alignment regardless of floor evenness but in instances where maneuverability of the cabinet is required, the optional FMA-CASTERKIT allows easy positioning without significantly increasing the cabinet's overall height. Extra reinforcement is included on the cabinet bottom eliminating the need for additional hardware in the caster mounting locations.

Cabinets include two pair (front/back) 11 gauge plated steel rack rails tapped 10-32 and include the new Atlas Sound RU indicators to aid in aligning equipment during installation. Holes are also provided in the rack rail to allow access to front door hinge locations when mounting surface mount doors. These hinge locations are pre-drilled & plugged on the front of the cabinet to save installation time when a front door is required for the cabinet.

Ganging cabinet versions in the FMA series feature completely new side panels with locking hinges that "swing-out" for easy serviceability of equipment housed in the cabinet while maintaining security. These heavily reinforced side panels install easily on unique "lift-off" hinge assemblies. All mounting holes and cabinet hardware is provided to join multiple GA series FMA cabinets.

UL listing & seismic rating pending.

## OPTIONAL ACCESSORIES

### Vented side panels

FMA77-25LRPV-962 – Matches FMA77-25G-962

FMA77-30LRPV-962 – Matches FMA77-30G-962

### FMA-CASTERKIT

Includes (2) locking swivel and (2) rigid casters with mounting hardware. See SL10-1358.

### Perforated top panels

TPP-19-25-962 – Matches FMA77-25G-962

TPP-19-30-961 – Matches FMA77-30G-962

### Solid top panels

TPS-19-25-962 – Matches FMA77-25G-962

TPS-19-30-962 – Matches FMA77-30G-962

### High power top mounting fan kits

EFT19-25-962 – Matches FMA77-25G-962

EFT19-30-962 – Matches FMA77-30G-962

\* Does not account for 3.5" area in center of cabinet where door handle and lock could cause interference with equipment knobs if

MODEL	Rack Rail to Perforated Front Door Clearance (with front rack rail in forward-most position)*	Overall Usable Mounting Depth (front rail face to rear rail face with rails at full front extension front to bk)	Front Rack Rail to Rear Door Clearance (with front rack rail in farthest forward position)
FMA77-30G-962	1.5" (38mm)	28.74" (730mm)	29.375" (746mm)
FMA61-25G-962	1.5" (38mm)	24.24" (616mm)	24.875" (632mm)



rack rails are located fully forward.

*Specifications subject to change without notice*




**Northeast Total Communications**


Toll free: (800)-362-7542 Fax: (215)-639-2476 E-mail: info@ntcinc.com

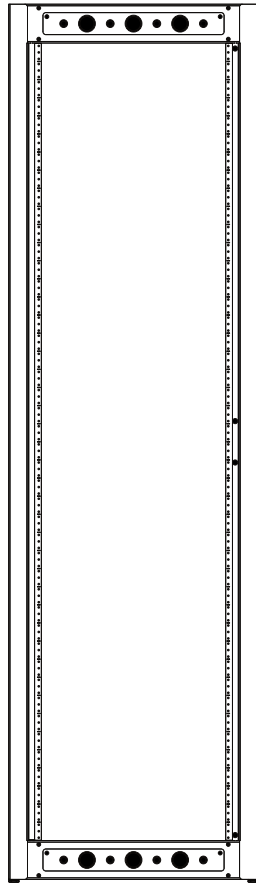


BACK VIEW

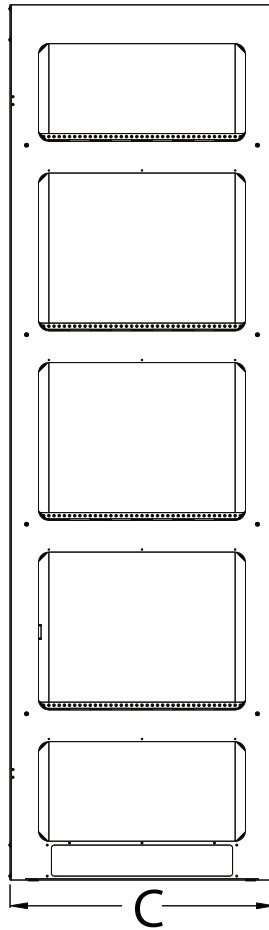


SIDE VIEW

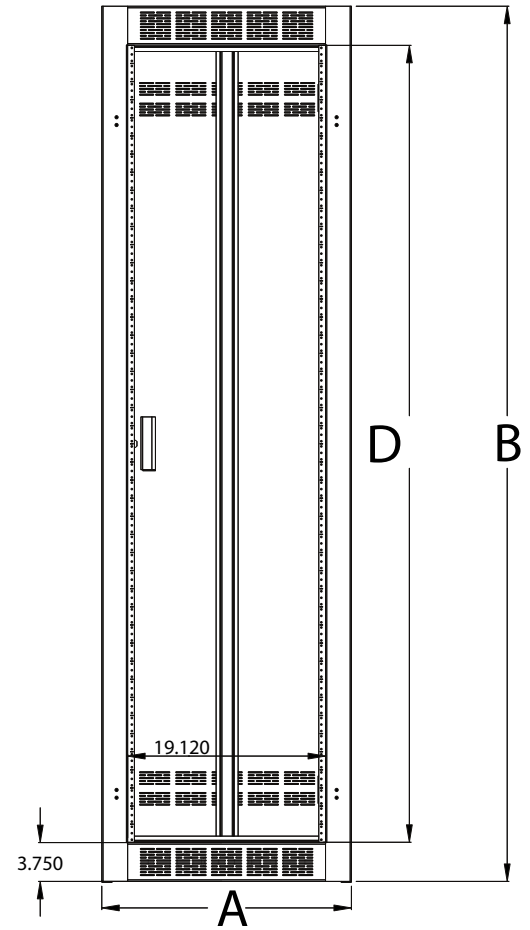

FRONT VIEW

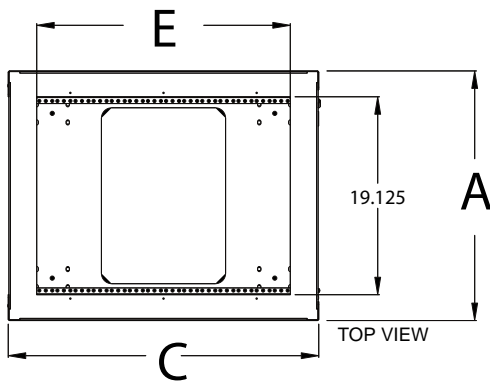

TOP VIEW

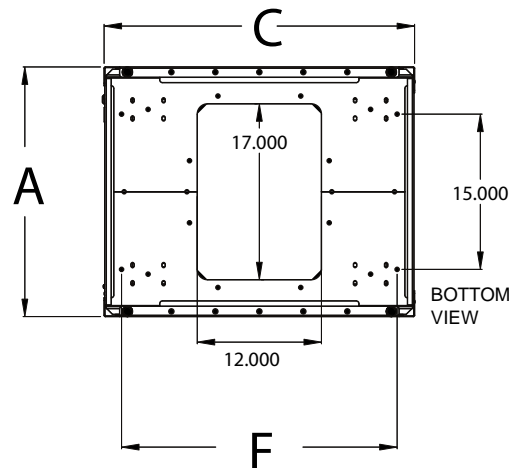

BOTTOM VIEW

MODEL GANGING (G)	OUTSIDE DIMENSION			PANEL SPACE (D)	TOP PANEL OPENING (E)	FLOOR MOUNTING HOLE LOCATION (F)	OPTIONAL VENTED SIDE PANELS	OPTIONAL PERFORATED SURFACE MOUNT FRONT DOOR	OPTIONAL CASTER KIT
	WIDTH(A)	HEIGHT(B)	DEPTH (C)						
FMA77-30G-962	24.0625 (611MM)	84.625 (2149MM)	30" (762MM)	77.125 (1959MM)	24.5 (622MM)	26.625 (676MM)	FMA77-30LRPV-962	FMA77-SDV-962	FMA-CASTERKIT
FMA77-25G-962	24.0625 (611MM)	84.625 (2149MM)	25.5" (648MM)	77.125 (1959MM)	21.0625 (535MM)	22.125 (562MM)	FMA77-25LRPV-962	FMA77-SDV-962	FMA-CASTERKIT

Specifications subject to change without notice



Northeast Total Communications

Toll free: (800)-362-7542 Fax: (215)-639-2476 E-mail: info@ntcinc.com

TEN

## ARCHITECT AND ENGINEER SPECIFICATIONS

FMA SERIES. Equipment rack shall be Atlas Sound Model \_\_\_\_\_. It shall be 14 gauge CRS frame with 14 gauge top and bottom sections and include two pairs of 11 gauge CRS adjustable mounting rails plated, drilled and tapped 10-32 with hash marks to indicate rack unit increments. Bottom section shall be reinforced with 12 gauge stiffeners front to back. Base to be tapped to accept factory installed leg levelers and punched to accept optional casters. Cabinet depth shall be \_\_\_\_\_. Frame shall be finished in -962 black powder coat epoxy.

Optional:

Cabinet shall be enclosed with 16 gauge CRS swing out side panels Model\_\_\_\_-962. Side panels shall include locks keyed with technician key.

Racks shall be provided with 16 gauge CRS solid or perforated top panel Model\_\_\_\_, -962.

Racks shall be provided with 550 CFM top mounting fan panel Model\_\_\_\_ -962.

Door(s) shall be 16 gauge CRS frame with perforated steel inserts for maximum ventilation and visibility model FMA77-SDV-962. Doors shall include cylinder lock, handle and shall be hinged (right, left).

Model\_\_\_\_. Single frame and/or entire installation shall be on casters Model FMA-CASTERKIT.

*Specifications subject to change without notice*



**Northeast Total Communications**

Toll free: (800)-362-7542 Fax: (215)-639-2476 E-mail: [info@ntcinc.com](mailto:info@ntcinc.com)